




KIT 3608

STAR TREK VOYAGER™

Kazon Torpedo

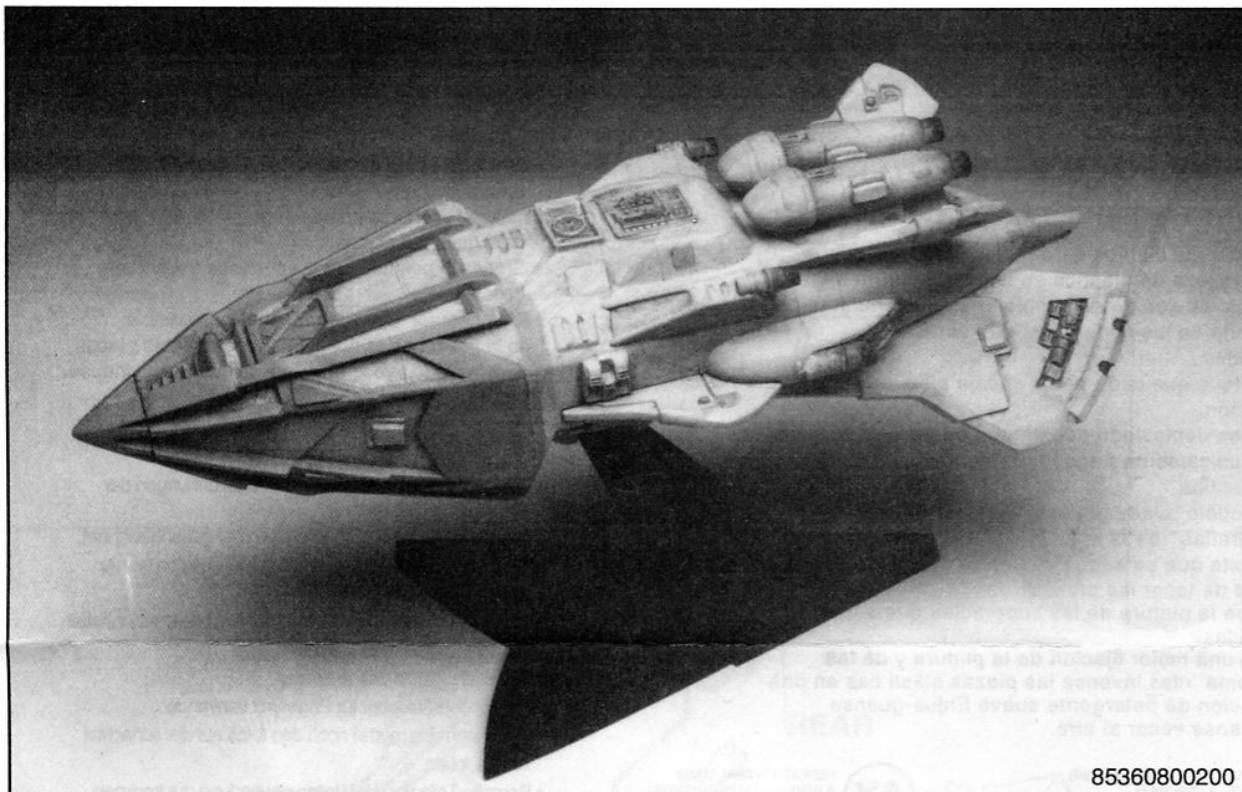

85360800200

The Kazon-Ogla™ are a desperate people and as such, they are known to use desperate measures to attain their sinister goals. One of their more daring methods involves the use of a kamikaze-like ship called the Torpedo. The ship is literally rammed through the hull of an enemy spacecraft at a high rate of speed in order to board the targeted ship. When the Kazon™ Torpedo rammed the U.S.S. Voyager™, it was the first time that the structural integrity of the starship had been breached. The Kazon, after emerging from their ship, were able to steal a transporter module and escape through Voyager's cargo bay.

TM & © 1996 Paramount Pictures. All Rights Reserved. STAR TREK and Related Marks are Trademarks of Paramount Pictures. Revell-Monogram, Authorized User.

If you have any problems building this model, call our modeling tips hotline at: (800) 833-3570

REVELL-MONOGRAM, Morton Grove, IL Copyright © 1996 All rights reserved. Made in U.S.A.

ASSEMBLY INSTRUCTIONS

READ THIS BEFORE YOU BEGIN

- Study the assembly drawings.
- Each plastic part is identified by a number.
- Scrape plating from areas to be cemented
- Check the fit of each piece before cementing in place.
- Do not use too much cement to join parts.
- Use only cement for polystyrene plastic.
- Models may be painted to match photos on box.
- Allow paint to dry thoroughly before handling parts.
- Scrape paint from areas to be cemented.
- For better paint and decal adhesion, wash the plastic parts in a mild detergent solution Rinse and let air dry.

LEA ESTO ANTES DE EMPEZER

- Estudie los dibujos de ensamblaje.
- Cada pieza de plástico se identificapor un número.
- En los dibujos de ensamblaje, algunos número de los • Raspe el laminado de las superficies que serán pegadas.
- Verifique que cada pieza encaje bien antes de posición.
- No use demasiado pegamento para unir las piezas.
- Use únicamente pegamento paraplastico de poliuretano
- El modelo puede pintarse de acuerdo con las fotografías de la caja.
- Permita que se seque la pintura completa mente antes de tocar las piezas.
- Raspe la pintura de las superficiea que serán pegadas.
- Para una mejor fijacion de la pintura y de las calcomanías lávense las piezas plásticas en una solución de detergente suave Enjuague y dejen secar al aire.



DECAL (DIP IN WATER)
ABZIEHBILD
DECAL COMANIE (APLONDGANS L'EAU)
DECAL COMANIA (MOJECON AGUA)



REPEAT SEVERAL TIMES
A REPETER PLUSIEURS FOIS
AREBITSGANG MEHRMALS WIEDERHOLEN
REPITA VARIAS VECES

FEDERAL STANDARD COLOR NUMBERS

The box top can be used as a guide to paint your model, or you may wish to use the painting information on the back page of this instruction booklet to achieve a more accurate finish. The listed numbers refer to color samples printed in GSA SPECIFICATIONS. This publication is available from:

FEDERAL SUPPLY SERVICE BUREAU
GSA SPECIFICATIONS
470 EAST LAFANT PLAZA SW
Suite 8100
Washington, D.C. 20407

Write to GSA for information regarding current price and availability

LISEZ CE QUI SUIT AVANT DECOMMENCER LEMONTAGE

- Etudier les schémas d'assemblage.
- Chaque piece plastique porte un numéro d'identification.
- Sur les schémas d'assemblage les pieces dont le numéro
- Grattez le chromage sur les surfaces a coller.
- Contrôler que chaque pièce soit bien cinfirmé avant de la coller a sa place.
- N'utilisez pas trop de colle pour réunir les pieces.
- Utilisez uniquement une colle spéciale pour polystyrene.
- Le modele peut etre peint conformement aux photos surboite.
- Laissez sécher la peinture complètement avant de manipuler les pieces.
- Grattez la peinture sur les surfaces devant etre collées.
- Pour assurer la meilleure adhésion possible de la peinture des décalomanies, laver les pieces de plastique avecune légère solution savonneuse. Rinse et laisser secher a l'aire.

ALLGEMEINE HINWEISE

- Die Anordnung der Bauteile ist den Zeichnungen der Anleitung ersichtlich.
- Jedes Plastikteil ist durch eine Nummer gekennzeichnet.
- Die Beschichtung muss von allen Klebestellen vorher entfernt werden.
- Die Teile vor dem Verkleben ungeleimt zusammenhalten um ihre Passitz zu prüfen.
- Klebstoff nicht zu dick auftragen.
- Nur Modellbaukleber für Polystyrol verwenden.
- Man Kann das Modell nach den Fotos auf der Schachtel anstreichen.
- Bemalte Teile vor der Weiterverwendung gut trocknen lassen.
- Die Farbe muss von allen späteren Klebestellen abgeschabt werden.
- Damit sie Farbe und die Abziehbilder kleben sind die Plastikteile in einer milden Seifenlauge zu waschen. Dann abspülen und an der Luft trocknen lassen.


Every effort has been made to create and manufacture a model kit that is the finest available. If a part may be missing, please write to:

REVELL-MONOGRAM
Consumer Service Department
8601 Waukegan Road
Morton Grove, Illinois 60053


Be sure to include the kit number, part number, description, and your return address.

FLAT BLACK	88-0022	-	-	GLANZLOSES SCHWARZ	NEGRO APAGADO	NOIR TERNE
RED	88-0003	PMS 187C	(FS-31350)	ROT	ROJO	ROUGH
DESERT TAN	88-0025	PMS 465C	(FS-30475)	GELBBRAUN	CANELA	BRUN CLAIR
PURPLE	88-0010	PMS 521	(FS-27160)	PURPURN	PURPURA	POURPRE
DARK GHOST GRAY	88-0036	PMS 423C	(FS-26280)	DUNKELGRAU	GRIS OSCURO	GRIS FONCE
GREEN CHROMATE	88-0031	PMS 370C	(FS-34230)	GRÜN CHROMAT	CROMATO VERDE	CHREMAT VERT
GREEN BRITE	88-0006	PMS 3415C	(FS-34090)	GRÜN	VERDE	VERT
COPPER	-	PMS 876C	-	KUPFER	COBRIZO	CUIVRE
YELLOW	88-0005	PMS 109C	-	GELB	AMARILLO	JAUNE


1

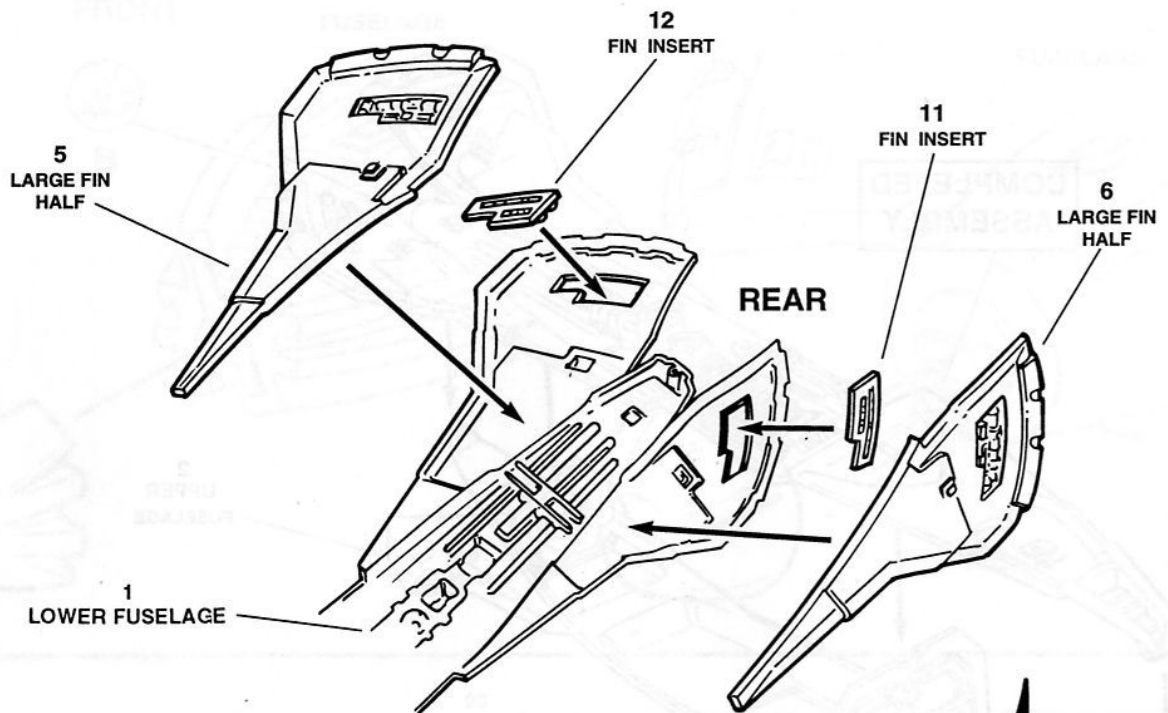


2

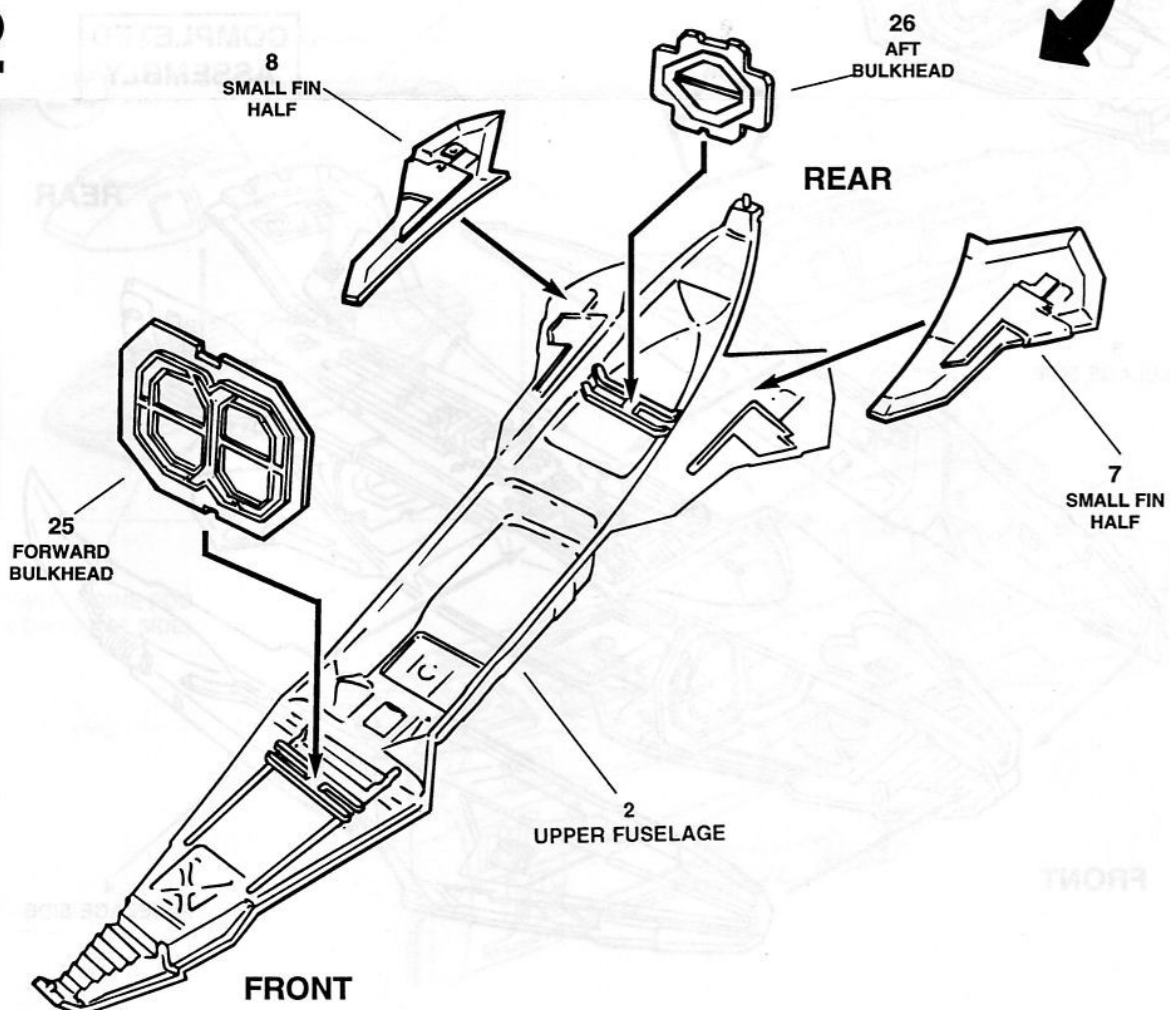


3

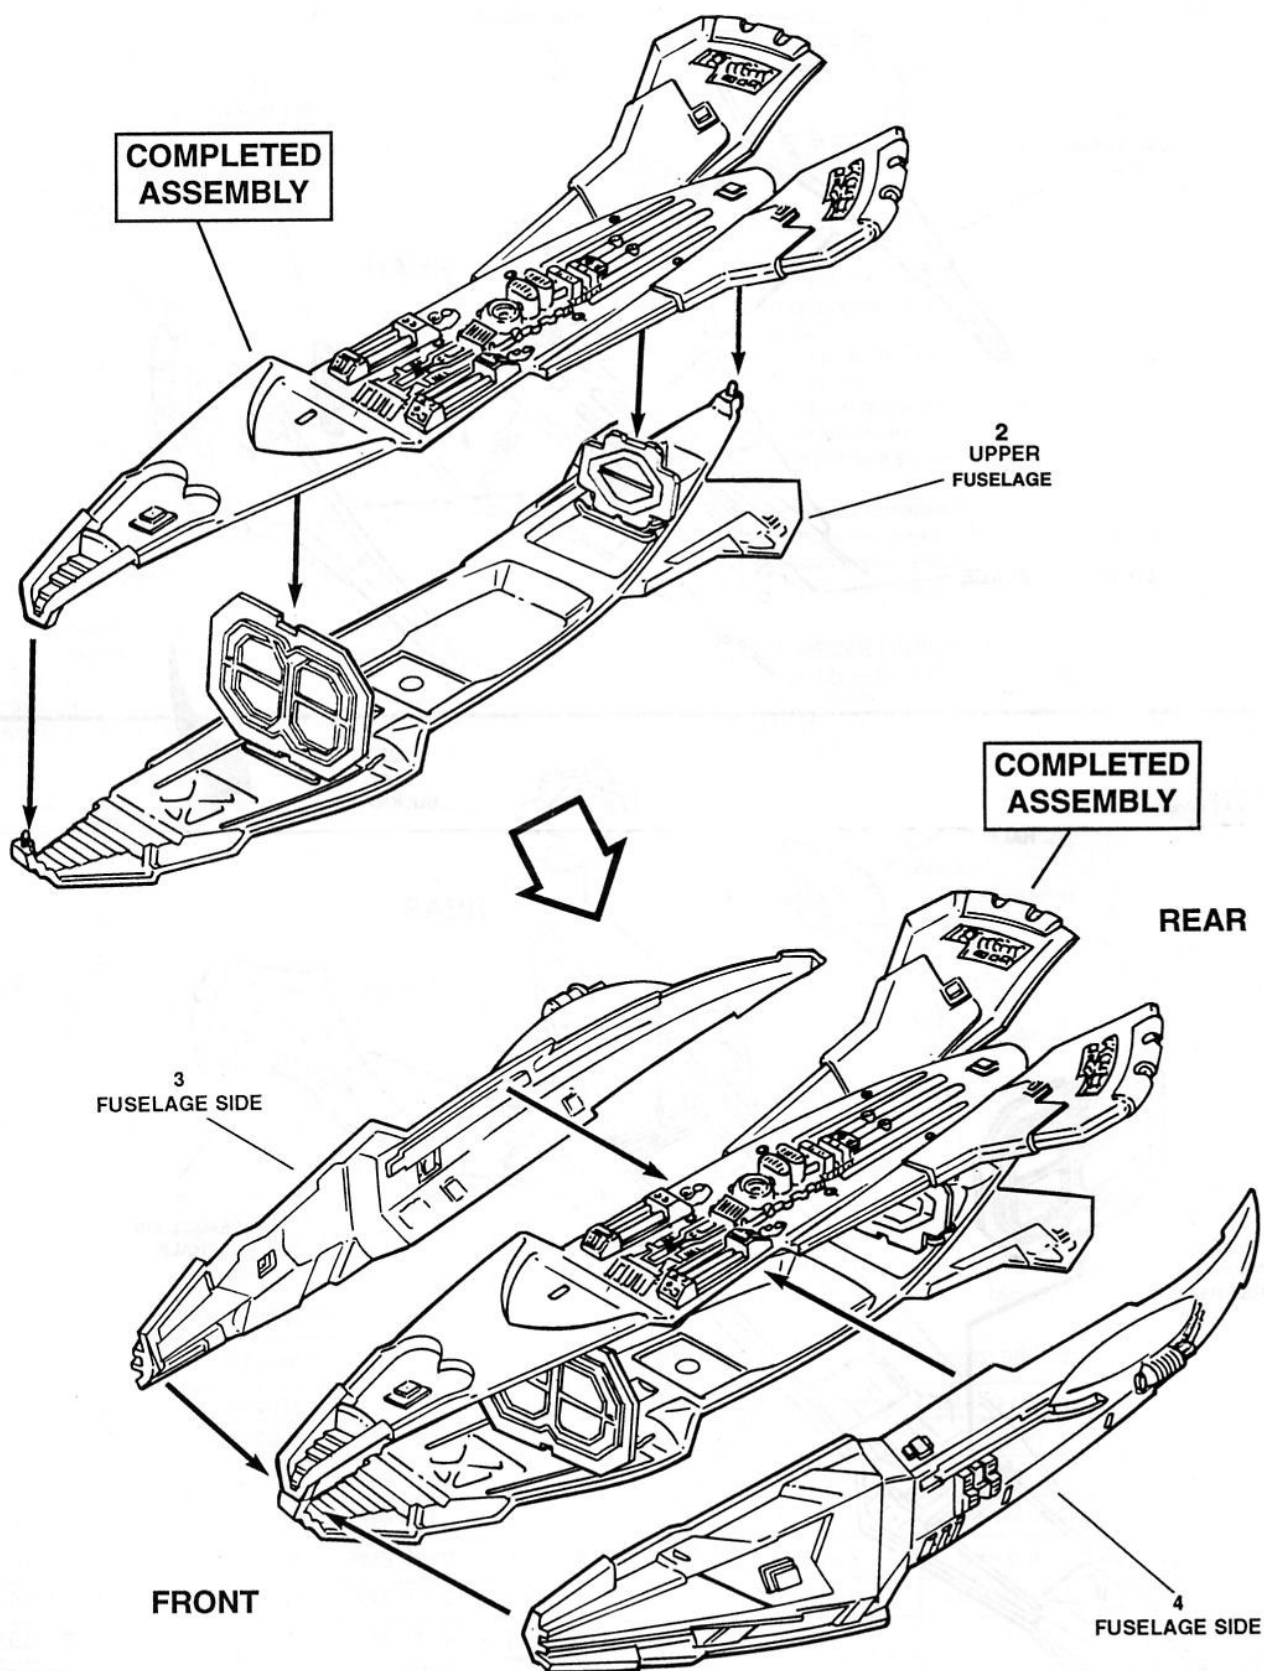

4

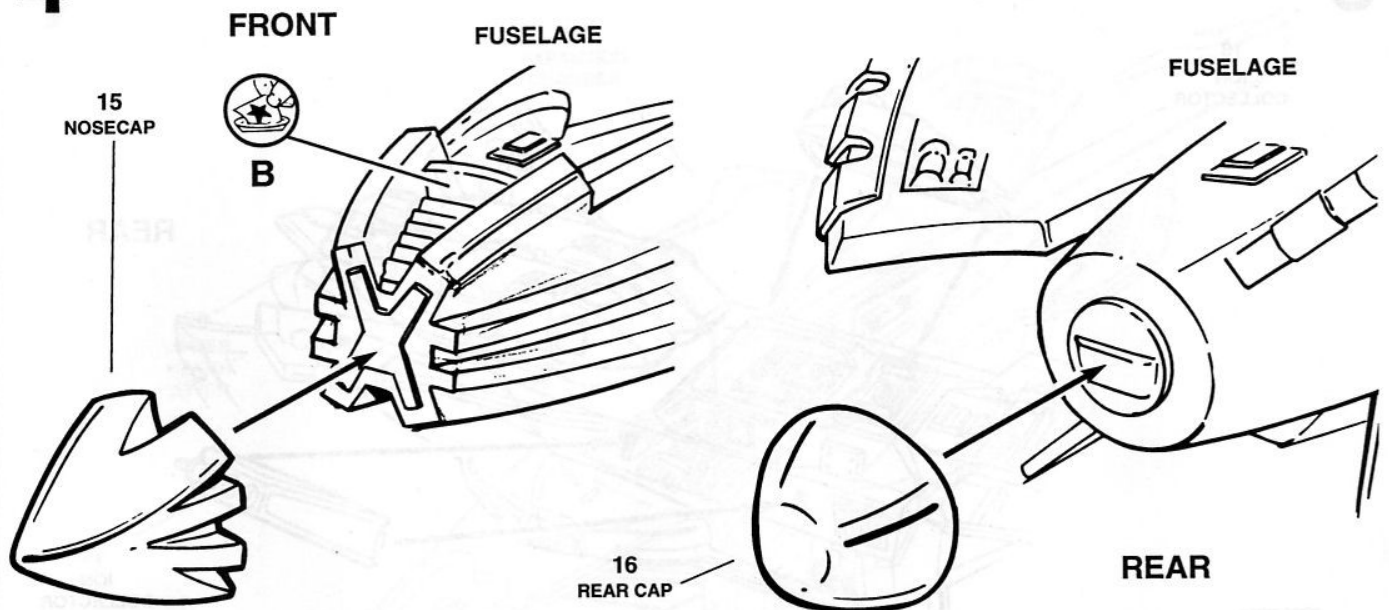


5

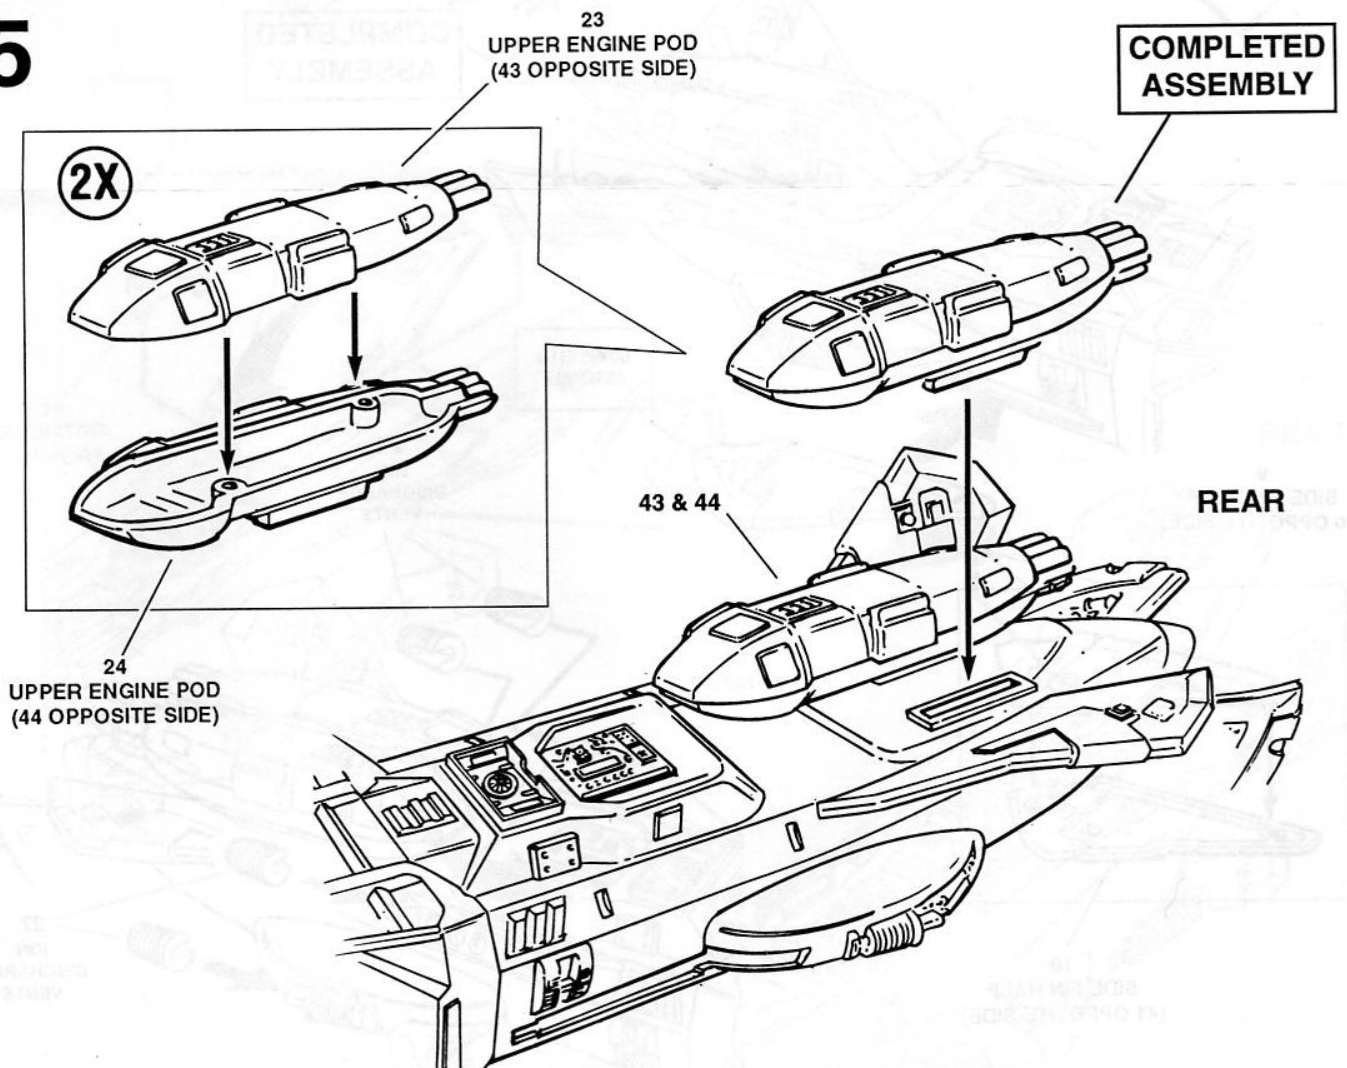


6

13
ION
COLLECTOR

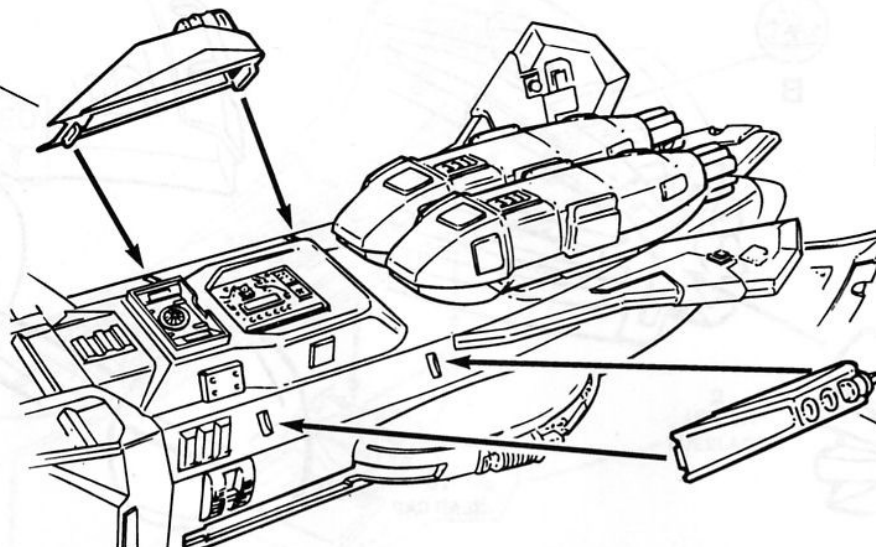


REAR


14
ION
COLLECTOR



COMPLETED
ASSEMBLY

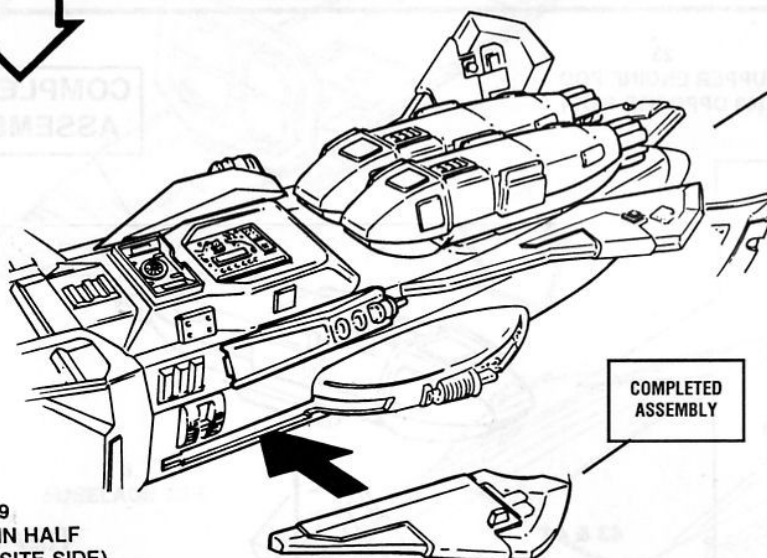


9
SIDE FIN HALF
(40 OPPOSITE SIDE)

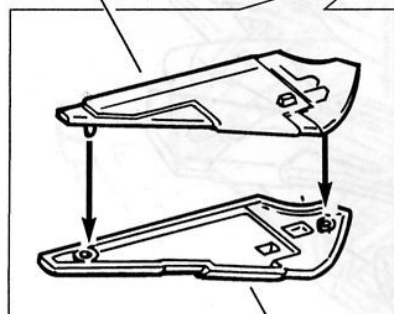




10
SIDE FIN HALF
(41 OPPOSITE SIDE)

COMPLETED
ASSEMBLY

27
ION
DISCHARGE
VENTS


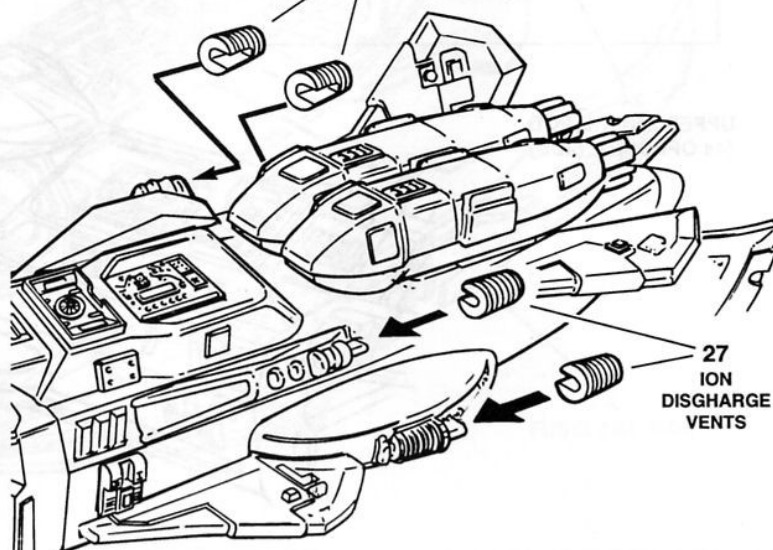


7

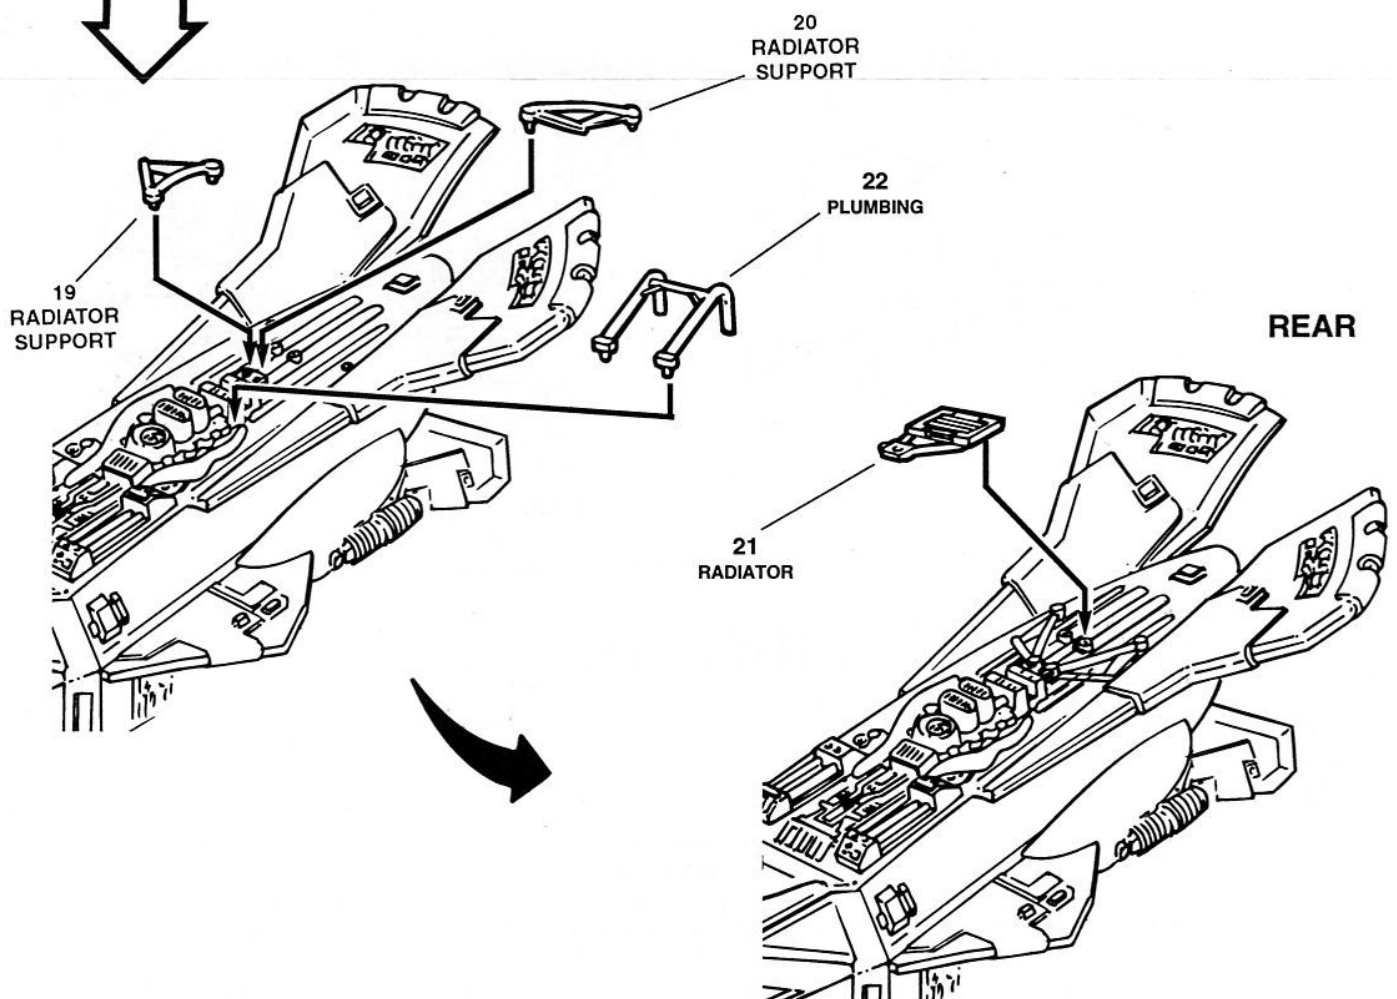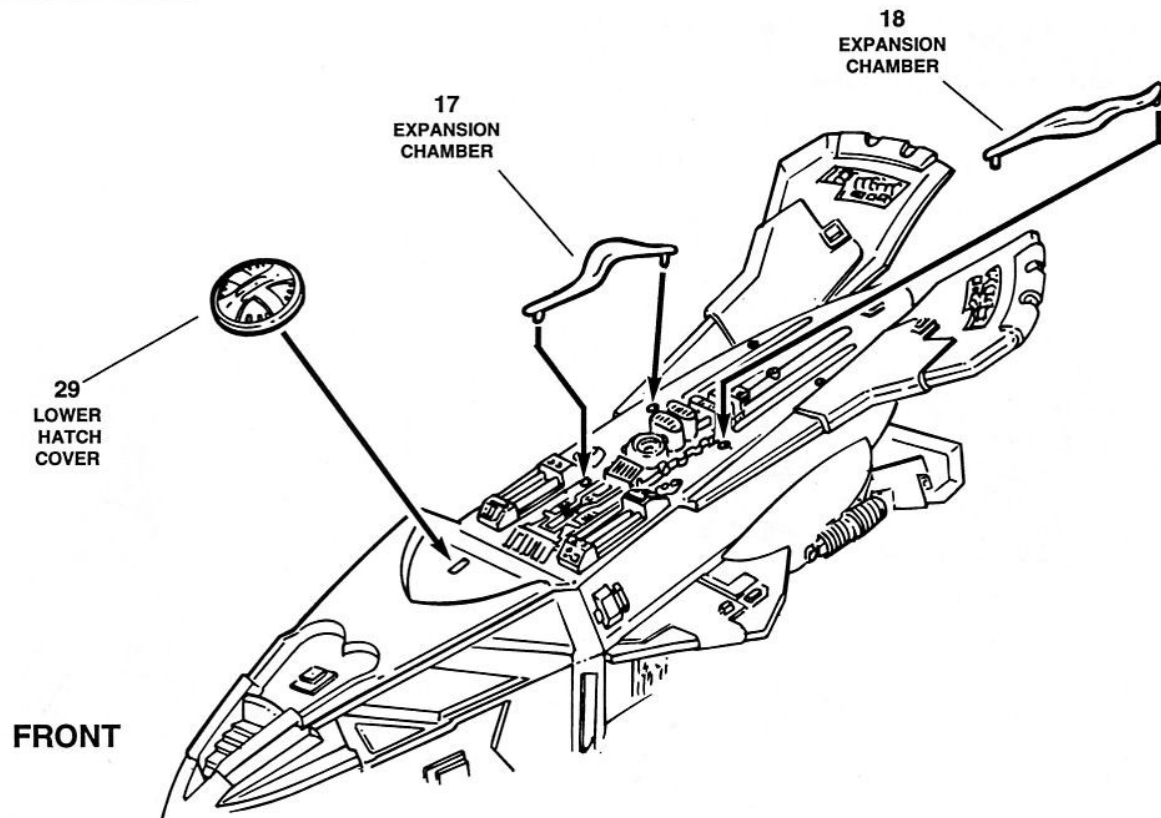

8 FINAL ASSEMBLY

TOP SIDE

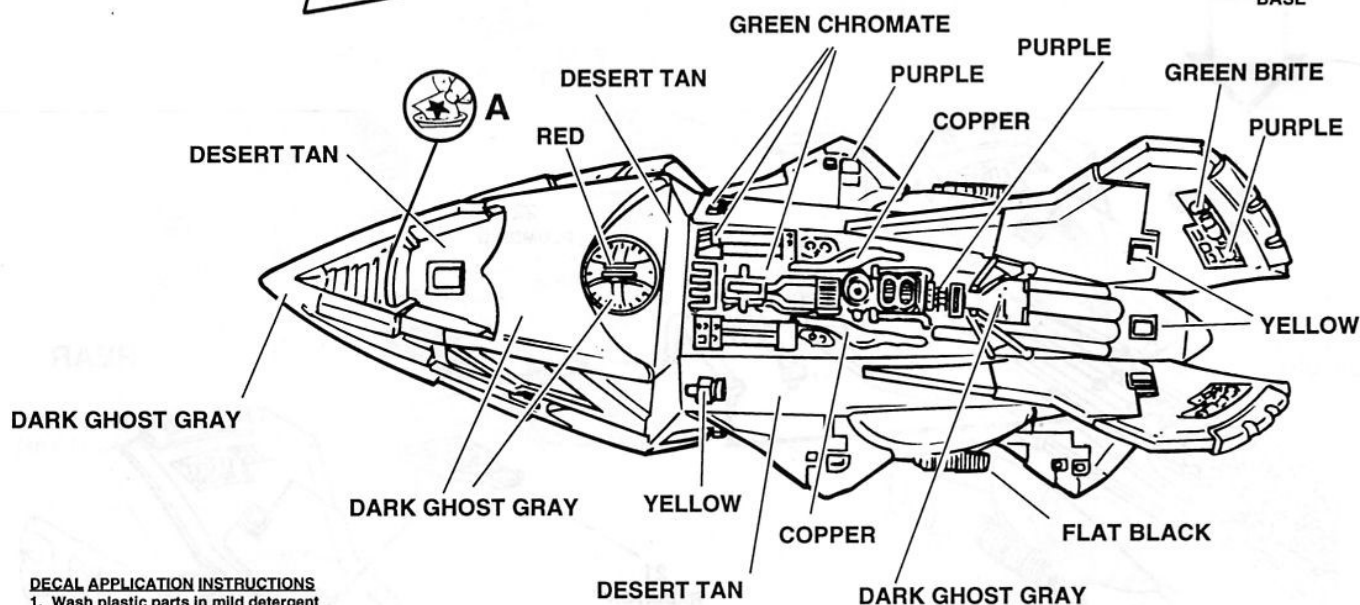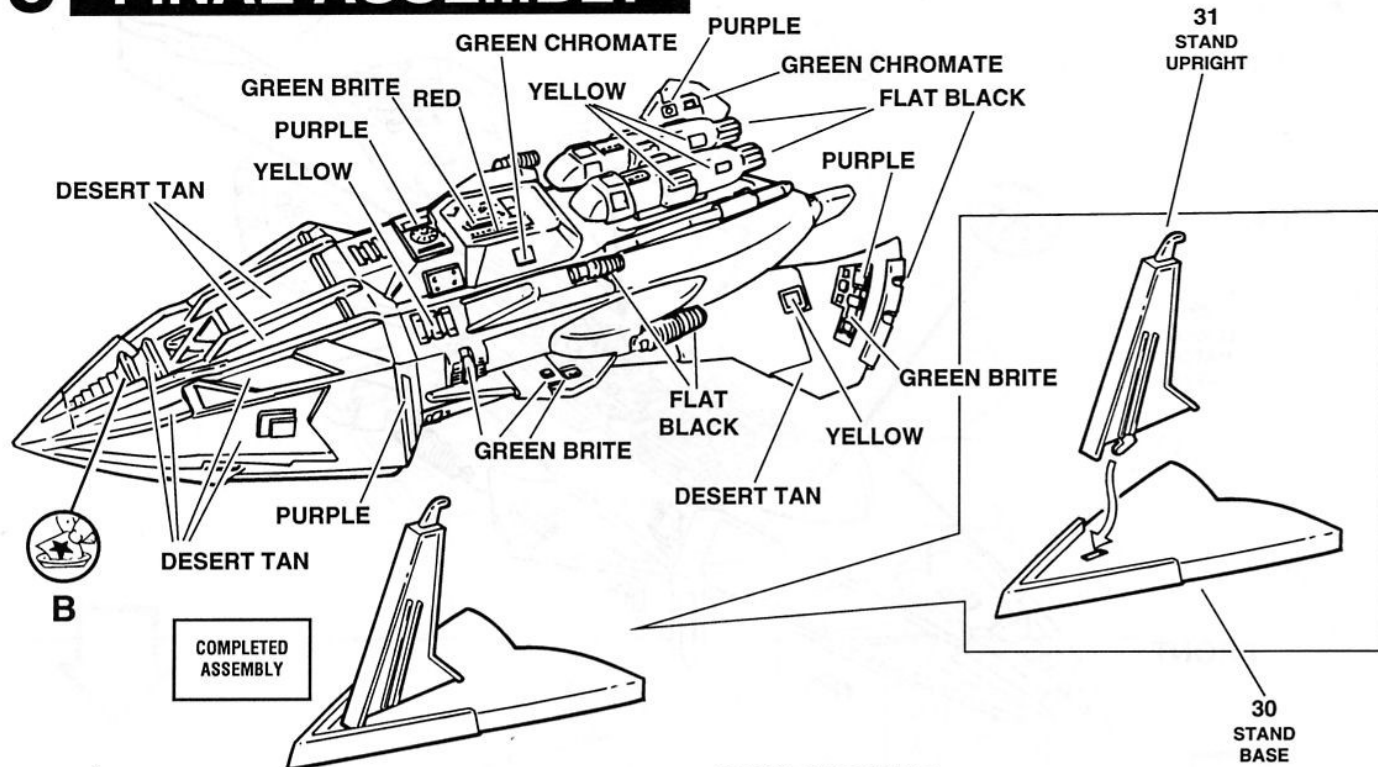

DECAL APPLICATION INSTRUCTIONS

1. Wash plastic parts in mild detergent solution. Rinse and let dry.
2. Cut desired decal from sheet.
3. Dip decal in water for a few seconds.
4. Place wet decal on paper towel.
5. Wait until decal is movable on paper backing.
6. Place decal in position on model, face up and slide backing away.
7. Press out air bubbles with a soft damp cloth.
8. Milkyness that may appear is for better decal adhesive and will dry clear. Wipe away any excess adhesive.
9. Do not touch decal until fully dry.

BOTTOM SIDE

DECAL NOT COMPATIBLE
WITH SETTING SOLUTIONS
OR SOLVENTS

85360800200

PAINTING NOTE:

Thin down some flat black until it is the consistency of water. using a small hobby paint brush, apply some of the paint to a part of the model that has detail. Flow a little onto model and into the small cracks and crevices. The paint will settle in the small crevices and dry, creating a weathered appearance.